

## Water Treadmill

The Badu®Stream II Jet System offers many different options in a wide price range all aimed at pleasing a variety of exercise styles and budgets. The system accommodates installation in limited space and varying pool wall designs.

### features

- A.** Flush mounted jet housing.
- B.** Square anti-entrapment cover provides undetectable suction (8<sup>1</sup>/<sub>4</sub>" x 8<sup>1</sup>/<sub>4</sub>").
- C.** Adjustable water flow jet nozzles.
- D.** Air regulator controls amount of air bubbles in water flow. (black cover available)
- E.** Control box with GFCI.
- F.** Speck 4 HP or 3<sup>1</sup>/<sub>2</sub>" HP self-priming, plastic pump. UL Listed, single phase with thermal overload (no motor starter required).
- G.** Pulsating massage hose that can be attached to jet nozzle. (optional)
- H.** Winter cover kit. (not shown)

### Installation

The **BADUSTREAM** system is normally incorporated into the design, but it can be added to any pool at a later date.

The **BADUSTREAM** has no protruding parts ensuring pool users' safety.

All **BADUSTREAM** systems include control box with air button and 50 ft. air tubing. 4" or 3" plumbing is required, depending upon the package chosen. Read all instructions before installing.

*Consult your physician before attempting any strenuous exercise. This product may not be challenging or satisfying for all levels of exercise.*




Optional round covers available in the colors black, gray, and white.

Package A



All Badu® SwimJet Systems are VGB compliant and carry UL, MET and ASME approvals.

### BADU®STREAM II INSTALLATION SPECIFICATIONS

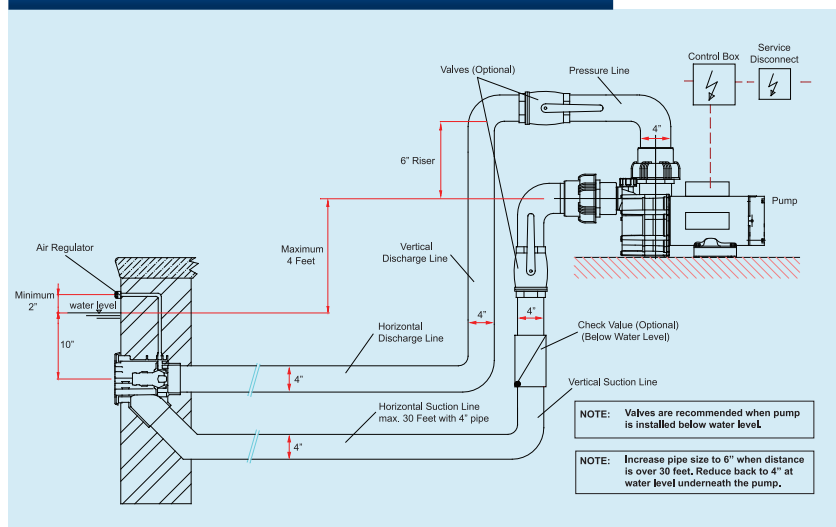

## BADU®STREAM II

### Package A

Two **BADUSTREAM II** Jets complete with one Speck Pump Model 21-80/33, 4HP, 208-230 Volts, 19A, 400 GPM @ 14 PSI and control box with GFCI. The most powerful single pump jet system available providing the recreational swimmer with an intermediate level of exercise. Minimum of 4" plumbing required. #2308000042

### Package B

One **BADUSTREAM II** Jet complete with one Speck Pump Model 21-80/33, 4HP, 208-230 Volts, 18.5A, 270 GPM @ 18 PSI and control box with GFCI. Same as package A, for swimmers who prefer the economy of single jet operation. Minimum of 4" plumbing required. #2308000040

### Package C

One **BADUSTREAM II** Jet complete with one Speck Pump Model 72-VI, 3<sup>1</sup>/<sub>2</sub> HP, 208-230 Volts, 13.5A, 180 GPM @ 12 PSI and control box with GFCI. Provides a moderate level of exercise for the recreational swimmer. Minimum of 3" plumbing required. #2308000030

### Package D

Three **BADUSTREAM II** Jets combined with two Speck Pump Model 21-80/33, 4HP, 208-230 Volts, 19A (each), 700 GPM @ 15 PSI and control box with GFCI. The most powerful dual pump jet system available providing maximum resistance for the recreational swimmer. Minimum of 4" plumbing required. #2308000046